



Flush-mount LCD
multimeters.
expandable
DMG610
Three-phase +
neutral

Product designation

Product type designation

Type

Auxiliary supply Us

Auxiliary rated supply voltage AC	VAC	100...440
Auxiliary rated supply voltage DC	VDC	120...250
Auxiliary operating voltage range		
AC		
	min VAC	90
	Max VAC	484
DC		
	min VDC	93.5
	Max VDC	300

Operational frequency		
	min Hz	45
	max Hz	66

Power consumption	Max VA	9.5
-------------------	--------	-----

Power dissipation Max	W	3.5
-----------------------	---	-----

Measuring voltage inputs

Rated voltage (Ue)		
	phase-phase VAC	600
	phase-neutral VAC	300

Operating voltage range		
	phase-phase VAC	50...720
	phase-neutral VAC	30...360

Voltage inputs operational frequency		
	min Hz	45
	max Hz	66

Voltage inputs measurement method		True RMS
-----------------------------------	--	----------

Connection method		Single. two. three-phase with or without neutral. balanced three-phase system
-------------------	--	---

Current inputs

Rated current (Ie)	A	1A/5A
--------------------	---	-------

Measurement range		0.025...6A
-------------------	--	------------

Measurement method		TRMS
--------------------	--	------

Overload capacity		+20% Ie by external CT with 5A secondary
-------------------	--	--

Overload peak	A	50A for 1s
---------------	---	------------

Accuracy

VLN voltage	±0.5%
VLL voltage	±0.5%
Current	±0.5%
Frequency	±0.05%
Active power	±0.5%
Active energy	Class 1 (IEC/EN 62053-21)
Reactive energy	Class 2 (IEC/EN 62053-23)

RS485 serial interface

Baud rate	bps	Programmable 1200...115200
-----------	-----	-------------------------------

Insulations

Rated insulation voltage Ui IEC/EN	V	600
Rated impulse withstand voltage Uimp	kV	9.5
Operating frequency withstand voltage	kV	5.2

Functions

Harmonic analysis	15th order
PLC logic	No
Type of communication port	RS485
Ethernet-RS485 gateway function	No

Mechanical features

Housing type	Polyamide
Terminals type	Removable
Conductor cross section	min mm ² 0.2
	Max mm ² 2.5
	min AWG 24
	Max AWG 12

Tightening torque (Max)	Nm	0.5
	lbin	4.5

Fixing	Flush-mounting
Weight	g 350


Ambient conditions

Temperature	Operating temperature	min °C -20
		max °C +60

	Storage temperature	min °C -30
		max °C +80


Relative humidity	%	<90
Maximum Pollution degree		2
Protection degree		IP54

Dimensions

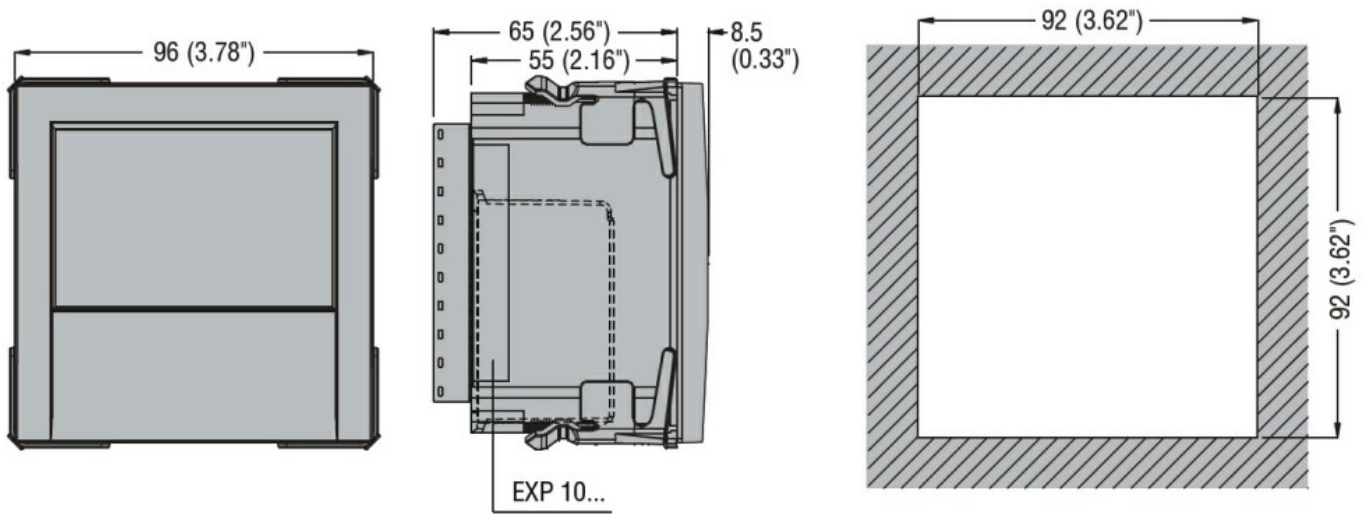


Wiring diagrams


Single-phase





Two-phase




Three-phase with or without neutral



Three-phase without neutral in ARON connection



Balanced 3-phase connection with or without neutral



CODE	AUX SUPPLY
DMG100-110-200-210-300	100...240VAC 110...250VDC
DMG6...	100...440VAC 110...250VDC
DMG7000-7500-8000-9000	100...240VAC 110...250VDC



Certifications and compliance

Compliance

- CSA 22.2 n°61010-1
- IEC/EN 61000-6-2
- IEC/EN 61000-6-3
- IEC/EN 61010-1
- IEC/EN 61010-2-030
- UL61010-1

Certificates

- cULus
- EAC
- GOST
- RCM

ETIM classification

ETIM 8.0

EC002301 -
Multifunction
measuring
instrument