


Junction box

## Abox 060-6<sup>2</sup>

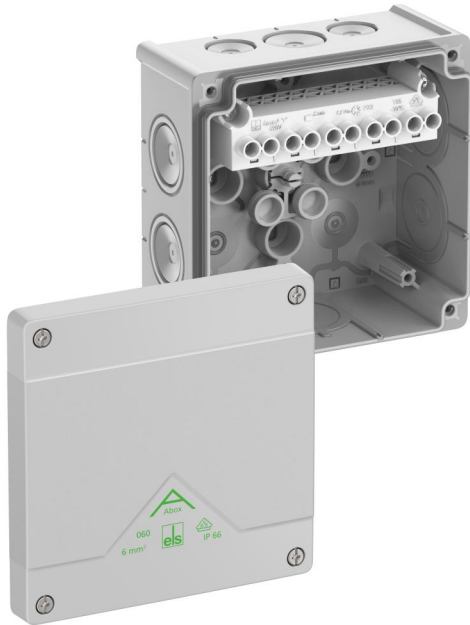

### Abox 060-6<sup>2</sup>

Junction box

Productnumber: 80642001

Dimensions: 127 x 127 x 70 mm

Junction box, protection class IP66, nominal cross-section 6 mm<sup>2</sup>, certified by VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), DLG (Ammonia resistance), self-sealing, soft insertion membranes, M20/M25/M32, sealing range 4 - 28 mm, (2 rear, 8 side), internal fixing points, for standard indoor and protected outdoor installations

**grey, U<sub>i</sub>=690 V AC, I<sub>n</sub>=41 A, with raised screw terminal block, 5-pole - 6 mm<sup>2</sup>, clampable cross-sections per pole: 4 x 1.5 mm<sup>2</sup>, 4 x 2.5 mm<sup>2</sup>, 4 x 4 mm<sup>2</sup>, 4 x 6 mm<sup>2</sup> rigid Cu/flexible with wire-end ferrule**



## Technical Data

### electrical characteristics

Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	690 V
Min. conductor cross section:	1,5 mm <sup>2</sup>
Max. conductor cross section:	6 mm <sup>2</sup>
Protection class:	II
Type of protection:	IP66
Rated current:	41 A
Terminal type:	Screw terminal
Number of poles:	5

### Colours

Base unit colour:	grey
Cover colour:	grey

### Dimensions

Width:	127 mm
Length:	127 mm
Height:	70 mm
Inner length:	114 mm
Inner width:	114 mm
Inner height:	54 mm

### Material characteristics

UV-resistant:	yes
Halogen free:	yes
Flammability class according with UL94:	HB
Glow-wire flammability according to EN 60695-2-11:	750 °C
Industry quality:	no

### mechanical properties

for sealing range min:	4 mm
for sealing range max:	28 mm
Impact strength:	IK07
Sealable:	yes
Cover screw torque:	1.2 Nm
Type of fastening:	Wall/ceiling mounting
Fastening:	internal fixing points

### Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	55 °C
24h ambient temperature:	35 °C
Installation location:	protected outdoor areas

### Sales Information

EAN:	4013902660841
Packing Unit Code:	C62
ETIM Class:	EC002600
Custom tariff number:	85369095

### Material

Base unit material:	Polypropylene
Cover material:	Polypropylene
Entry material:	Thermoplastic elastomer
Sealing material:	Thermoplastic elastomer
Cover screw material:	Stainless steel V2A

## Certificates

---

Test mark: VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22))

---

Test mark: DLG (Ammonia resistance)

---

## Accessories

[22742001 - KVR M20-MGM - Cable gland](#)

[22742101 - KVR M20-GDB/MGM - Cable gland](#)

[22742501 - KVR M25-MGM - Cable gland](#)

[22743201 - KVR M32-MGM - Cable gland](#)

[26042001 - DMS M20 - Double-membrane seals](#)

[26042501 - DMS M25 - Double-membrane seals](#)

[26043201 - DMS M32 - Double-membrane seals](#)

[89500101 - Abox PST 025-100 - Sealing kit](#)

[89510601 - Abox MPI 060 - Mounting plate](#)

[89530601 - Abox 060 NS35 - Standard rail](#)

[89600401 - Abox 060 KH 221 4<sup>2</sup> - Terminal holder](#)

[89640601 - Abox 060 KLS-6<sup>2</sup> - Terminal block](#)

[89602001 - MABF 100-1 - Mast/pipe fixing set](#)

[89600901 - KTB 1 - Fastening parts kit](#)

## Cable gland

